



BAKERLUX STATIONS

MODEL: BLS-3HLD-2H



XAKHT-HCHS HALF Size Ventless System for LED/TOUCH Convection Ovens

Water Connection is required for proper installation, filtration is highly recommended to prevent scale build up. Drain line or floor drain is needed.


UL 710 Emissions



*For XAKHT-HCHS

Water Consumption Note* 10.3 oz from 3 hours and 30 minutes from the baking cycle. Therefore you would need to put the water consumption at less then 3 oz per hour.

LED digital programmable controls:

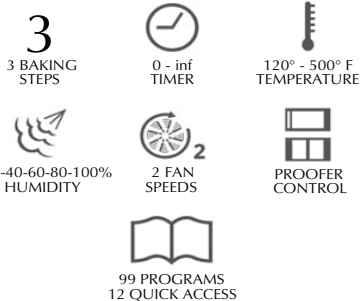


FEATURES

- Advanced air flow design & automatically reversible fan for even baking
- 3 baking steps
- Digital programmable controls: Time, Temperature, Humidity
- Heat settings from 175°-500° F
- Saves up to 99 programs with graphic control panel
- Handles 3 full size sheet pans (not included)
- 3 wire shelves included
- Cooking chamber: 10-1/4" H x 19-1/4" W x 14" D (1.6 cu. ft.)
- 10 hour timer or continuous on
- Light flashes and unit beeps at end of cycle
- Heavy duty stainless steel construction
- Heavy duty door & hinge construction
- Extra large motor for long lasting use
- 2-5/8" between shelves
- 1 fan; 2 fan speeds • Interior LED light
- Open Door/Auto shut off
- Includes electro valve for direct plumbed water connection
- "Cool-touch" double wall glass door opens from top
- Stackable with optional XWKQT-00HS-E Stacking Kit
- NSF; ETL to UL & CSA Standards/ listed by UNOX S.p.A.
- Energy Star rated • Chef Support - via phone
- 3 year Limited Warranty (two year On-site service & parts, 3rd year parts only)**
- **90 day warranty on light bulbs & gasket (not service center items); 30 days on glass; one year on motor
- 208-240 Volts / 2600-3300 Watts / 14 Amps / Single Phase / 60Hz
- NEMA 6-20P Plug



Incoming Water:

The bottom of the appliance contains 6.6 ft 7 in of pipe with a tee for connecting to the water supply (including mechanical filter and fitting (3/4") with non-return valve). A shut-off valve should be positioned between the water mains and the appliance.



We recommend that the end user have a standard ice-machine filter when using a humidity hookup.

OST-34A-CS

Heavy-Duty Aluminum Stand with Casters for Half Size Ovens
Handles 5 half size sheet pans (not included)

208-240
Volt

Drain line -or- floor drain is required.

Bakerlux Station Includes:



Model	Color	Volts	Watts	Amps	Unit Dimensions
XAKHT-HCHS	Stainless	208/240	200	1	W: 23.6875" H: 9.5" D: 28.3125"
XAFT-03HS-LD	Stainless	208/240	2600-3300	14	W: 23.6875" H: 16" D: 25.5"
OST-034A-CS	Stainless	N/A	N/A	N/A	W: 22.6875" H: 21.875" D: 26.75"

Unit Dimensions

28.3125"D x 23.6875" W x 65.1875" H

Shipping Unit Dimensions

Skid 1: 155 lbs 48"L x 40" W x 30" H

Skid 2: 169 lbs 48" L X 40" W x 48" H

CLASS 200

Made to Cadco Ltd. specifications by UNOX S.p.A., Italy NSF, ETL to UL & CSA Standards
We recommend that the end user have a standard ice-machine filter when using a humidity hookup.



www.cadco-ltd.com



860.738.2500



info@cadco-ltd.com